MXH Series – 2.0 x 2.5 Ceramic SMD Oscillator

- **Low Profile SMD Package**
- **Hermetically Sealed**
- **RoHS Compliant**
- **Wide Frequency Range**

ELECTRICAL SPECIFICATIONS:

Frequency Range		**1.544MHZ to 80.000MHZ**		
Temperature Stability*		**(See Part Number Guide for Options)**		
Operating Temperature Range		**(See Part Number Guide for Options)**		
Storage Temperature Range		**-40°C to +85°C**		
Aging (+25°C ±3°C)		**±5ppm for first year**		
Supply Voltage ±10% (Vdd)		**+1.80 VDC**	**+2.50 VDC**	**+3.30 VDC**
Supply Current	**1.544MHZ to 9.999MHZ**	**6mA max**	**7mA max**	**8mA max**
	10.000MHZ to 34.999MHZ	**7mA max**	**8mA max**	**10mA max**
	35.000MHZ to 49.999MHZ	**15mA max**	**20mA max**	**25mA max**
	50.000MHZ to 80.000MHZ	**25mA max**	**30mA max**	**35mA max**
Waveform		**HCMOS**		
Logic "0"		**10% Vdd max**		
Logic "1"		**90% Vdd min**		
Rise/Fall Time (10% to 90% of Supply Voltage)		**4nSec**		
Symmetry (50% of waveform)		**40%/60% (45%/55% optional)**		
Start-up Time		**10mSec max**		
Tri-State Operation		**Vih = 70% of Vdd min to Enable Output Vil = 30% max or grounded to Disable Output (High Impedance)**		
*** Inclusive of Temperature., Load, Voltage and Aging**				

MECHANICAL DIMENSIONS:

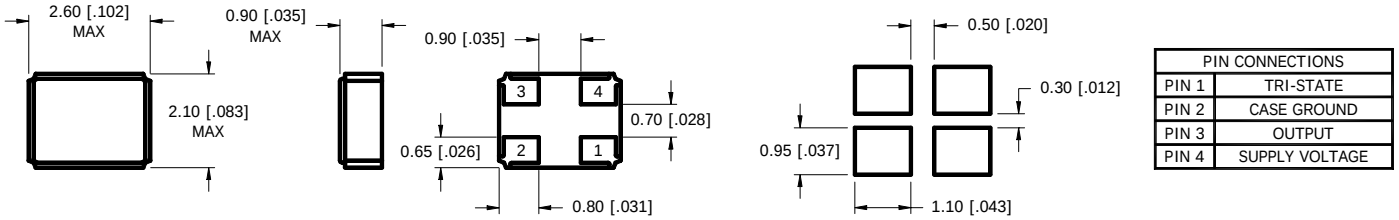

PIN CONNECTIONS	
PIN 1	TRI-STATE
PIN 2	CASE GROUND
PIN 3	OUTPUT
PIN 4	SUPPLY VOLTAGE

DIMENSION IN BRACKETS ARE IN INCHES
EXTERNAL BYPASS CAPACITOR IS RECOMMENDED

RECOMMENDED
LAND PATTERN

PART NUMBER GUIDE:

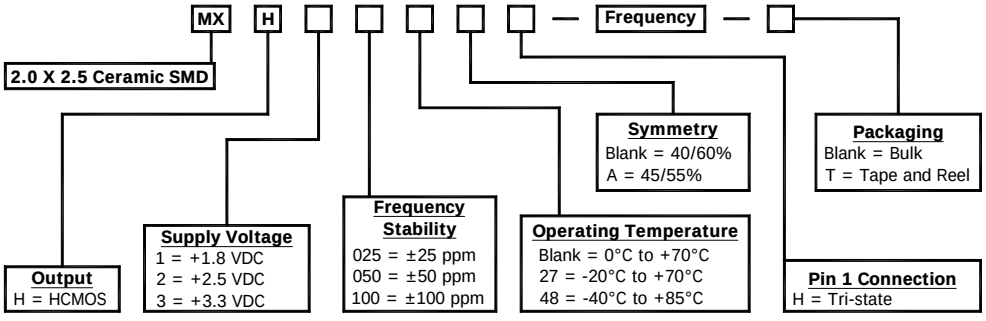

Please Consult with MMD Sales Department for any other Parameters or Options

MMD Components, 30400 Esperanza, Rancho Santa Margarita, CA, 92688
Phone: (949) 709-5075, Fax: (949) 709-3536, www.mmdcomp.com
Sales@mmdcomp.com